




PRODUCT **26**
SHOWCASE
illuminating lives smartly



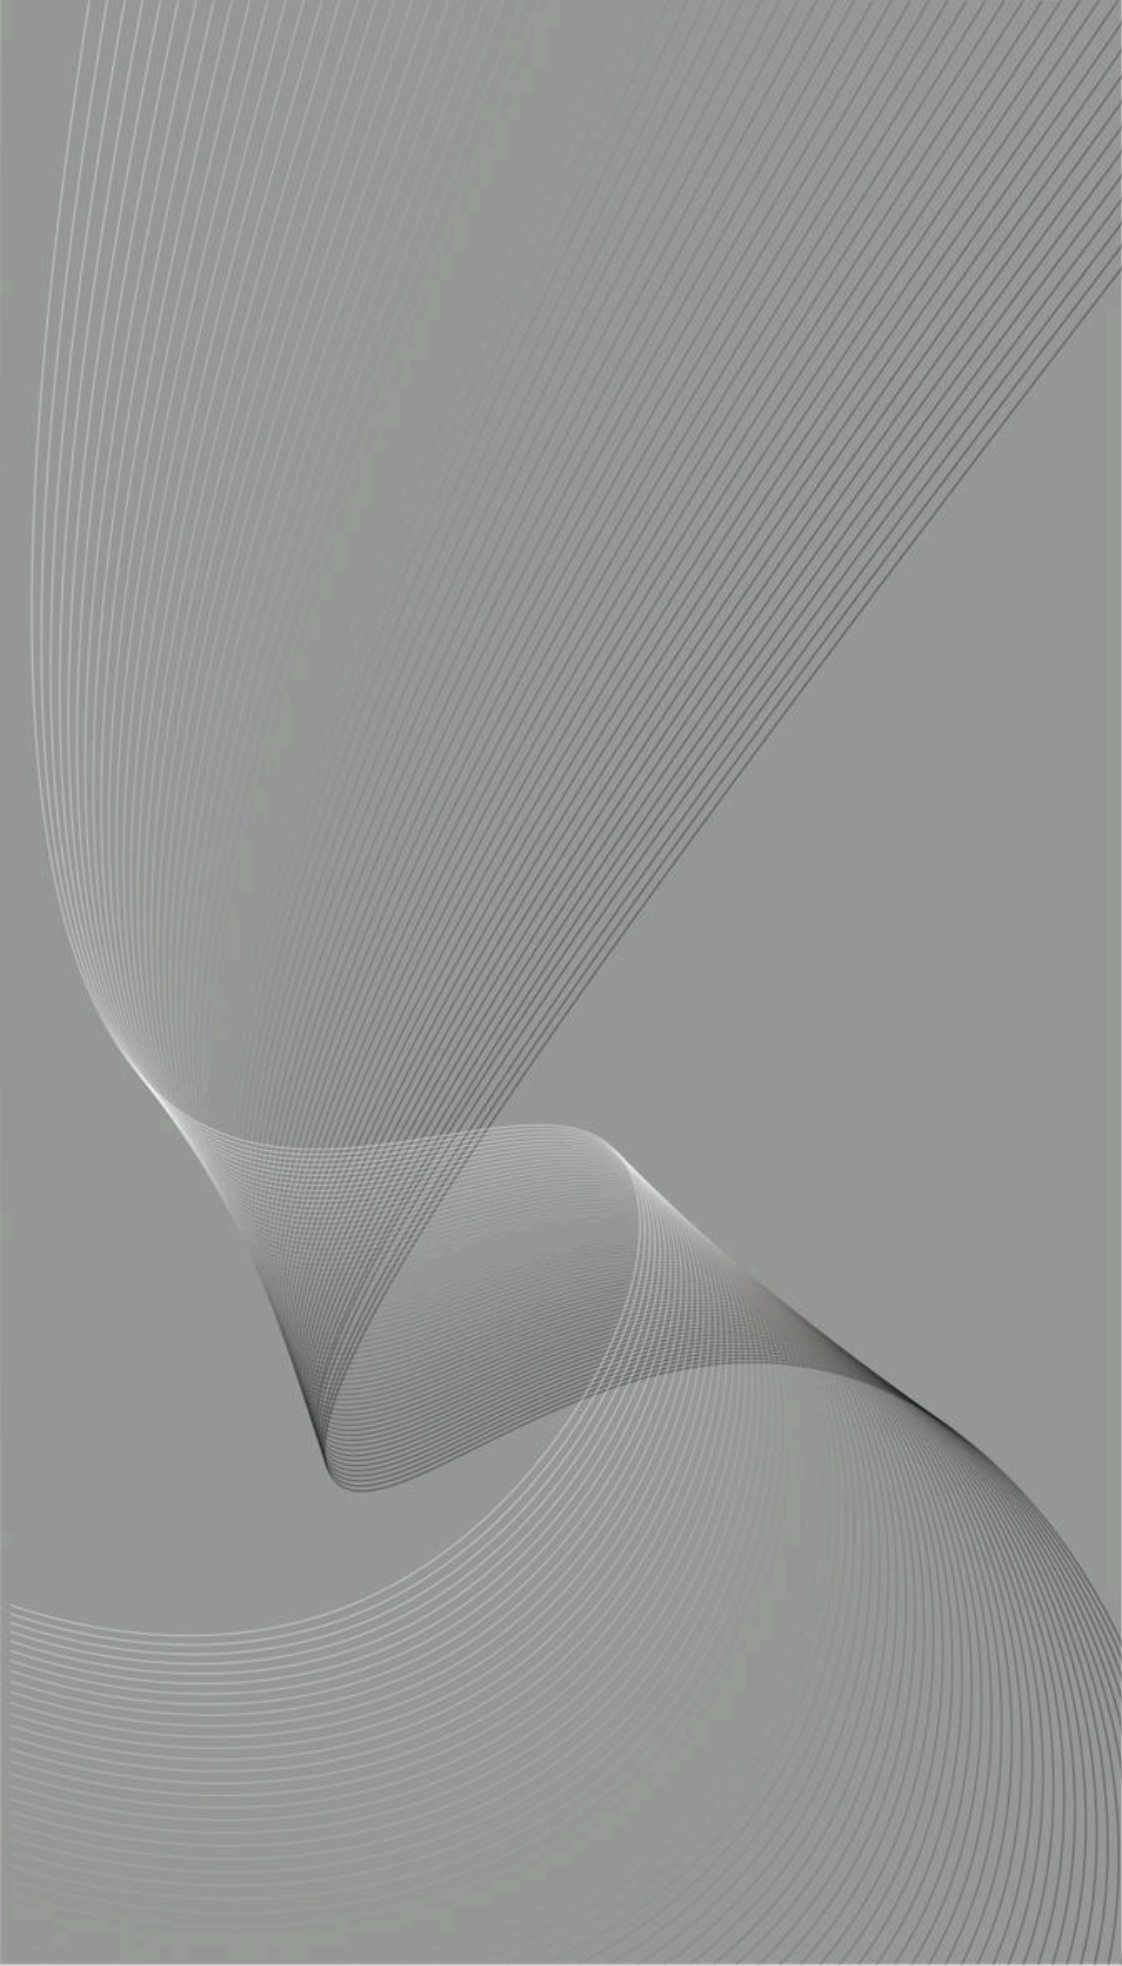

Trix is a brand owned by **Focus Lighting & Fixtures Ltd.** Mumbai, having presence in India, Middle East & Singapore. Focus Lighting has been leader in Retail Segment thru brand **PLUS** and also a pioneer in smart Lighting under Brand L&B.

Focus Lighting since inception at 2005 is known for various design & Technological breakthroughs in lighting solutions & been a driving force for many innovations.

Trix is an enterprising venture by Focus Lighting, dwelling on vast experience and knowhow in developing, manufacturing & supplying lighting solutions. Our basket has solutions for Residential, Hospitality, Offices, Retail & Commercial solutions, with energy optimisation being central to sustainable future, the trend setting new range of TRIX LED's are a perfect combination of aesthetics & efficiency.

We are continuously innovating Smart Lighting Initiatives or connected lighting with a consistent investment on internet of things(IOT) with a vision of providing **HUMAN CENTRIC LIGHTING** solution to individuals.

TRIX high Quality fixtures are easy to install, use & maintain, meeting stringent standards of quality for ecologically & economically sensible solutions. All Trix product basket is a perfect balance & mix of Design, Innovation, Efficiency along with value proposition that is economical.

Innovating

for Efficiency



Sustainable, Green Technology

LED technology is the light source of the future. A convenient, highly efficiency, energy-saving light source has a long life cycle and an absence of mercury.



High Lumen Efficiency

The radiation pattern of the LED eliminates the need to direct the light around the source. As a result, there is no light loss at the source, thus increasing its efficiency.



Low energy Consumption

When compared to conventional lighting system such as CFLs and Low-Voltage Halogens, LED's show a remarkable advantages in power consumptions.



Long Product life

LEDs have a long product life of up to 50000 hours with less than 3% drop in light output over its service life.



Convenient

Well Designed and easy to install, LED luminaires are compact and shock-proof. A long product life allows for extensive maintenance-free intervals.



Controlability

LED lamps attain full power the moment they are switched on. Moreover, they easily dimmed to a desired level using suitable drivers.



Mercury Free

Mercury, known to be toxic, is harmful to humans as well as the environment. In comparison to other sources of light, LEDs contain absolutely no mercury.



UV and IR Radiation Free



In comparison with conventional lamps, LEDs produce UV/IR-Free light thus eliminating thermal radiation to the illuminated object.



High Colour Rendering Index

The Colour Rendering Index (CRI) measures the ability of light to reproduce the colours in comparison with an ideal light source. LED has a high CRI of about >80 to >90.

Product Category

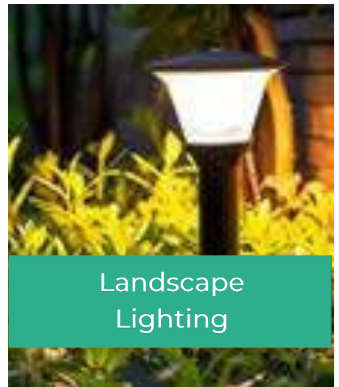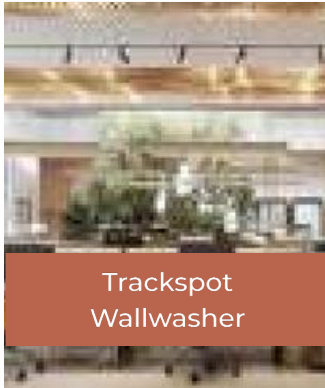

Product flow

Downlights & Spotlights

Dot / Florid	01
Abbys / Glow FX	02
Glow FX DL / Merlin	03
Avio DL / Dart	04
Wads/Wega	05
Arcus L / Arcus DF	06
Zeus 1x / Zeus 2x	07
Zeus 3x / Zeus 4x	08
Minis RS FX / Minis TR FX	09
Minis RS ADJ / Minis TR ADJ	10
Glow Mini / Gleam Mini	11
Gleam / Ave	12
Erica L RS / Erica R RS	13
Erica L TR / Erica R TR	14
Comet DL / Axora	15
Comet DL L FX / Comet DL L ADJ	16
Flare RD / Flare DR	17
Glow / Glaze	18
Bona / Enzo	19
Tubus D S / Tubus D L	20
Comet SF S / Comet SF L	21
Tubus D DF / Nero	22

Trackspots & Wallwashers

Avio NX / Avio NX SQ 1X	25
Avio NX SQ 2X / Delta	26
Picisel / Tubus D	27
Octa SF / Octa	28
Comet / Vista	29
Cane / Glow	30

Panel & Grid Lights

Brillo 2x2 / Brillo 4x1	33
Bolt Round / Bolt Square	34
Bezel Round / Bezel Square	35
Plano Round / Plano Square	36
Verve S Round / Verve S Square	37
Viva / Luna	38

Linear & Cove Lights

LYNQ / Fila Surface	41
Fila Recessed / Fila Pendant	42
Laser Line RS / Laser Line RL	43
Laser Line SS / Lase Line SL	44
Span / Neon Flex	45
Alloy RS / Alloy SF	46
Alloy Corner / Serie 2835	47

Magnetic Series (MGT23)

MGT23 TS / MGT23 RS	51
MGT23 WWG / MGT23 FXG	52
MGT23 DWW / MGT23 FXD	53
MGT23 PDT RD / MGT23 Deco	54
MGT23 PDT N / MGT23 PDT D	55
MGT23 TRACK / MGT23 Accessories	56

Landscape Lighting

Versa / Bloom	59
Terra / Twist	60
Maple / Oak	61
Pathos / Cube	62
Circa / Judy	63
Dazzle / Colon	64
Bolete / Iris	65
Rivera / Tulip	66

Industrial & Outdoor

Solus	69
Neva	70
Innova / Arena	71



Downlights Spotlights

A downlight is a light fitting (luminaire) that lights in a downward direction to light an area below. They are usually recessed into the ceiling so you see only a small part of fitting below the ceiling. Downlights are generally installed in the surrounding ceilings of bedrooms, living rooms, and bathrooms. Recessed LED lighting fixtures, embedded in the ceiling, are popular in the lighting market.

Spotlights are designed for emphasis, to focus a narrow beam of light at a particular point. Spotlights are fixtures that are used to specify that the illumination on the target surface is higher than that of the surrounding environment. In contrast to LED Downlights, the beam distribution generally does not exceed 45°, 60° degrees. Spotlight use discrete LEDs or Cobs, which are super energy efficient and can run for tens of thousands of hours without failing.

DOT

Recessed Fix Downlight

Aluminium housing with white powder coating. Bright spot deep recessed housing and glare free light effects. Efficient reflector and high output.

Suitable for Spot Light solutions


Beam Angle : 24°/ 36° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
5W	500lm
10W	1000lm
15W	1500lm

Dia(x)	Ht(h)	Cutout
46	62	ø36
55	93	ø40
76	99	ø70



FLORID


Recessed Fix Downlight

Fixed Deep recessed die cast aluminium fixture with colour reflector. Available in white & black deep front housing for less glare.

Suitable for residential & architectural applications.


Beam Angle : 25°/ 38°/ 60° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
7W	700lm
12W	1200lm
15W	1500lm
18W	1800lm

Dia(x)	Ht(h)	Cutout
74	68	ø65
85	78	ø76
85	78	ø76
100	95	ø90



**Reflector Shades Available: Silver Chrome, Rose Gold, Dark Chrome, Matte Gold.*

ABYSS

Recessed Fix Downlight

Fixed Deep recessed die cast aluminium fixture. Available in white & black deep front housing for less glare feel. Options of different beam angles as per installation needs.

Suitable for residential & commercial applications.


Beam Angle : 24°/ 38°/ 60° **CRI:** 80/90
Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
7W	700lm
12W	1200lm
18W	1800lm
30W	3000lm

Dia(x)	Ht(h)	Cutout
70	65	ø60
85	75	ø76
95	100	ø86
115	105	ø105



GLOW FX

Recessed Fix Downlight

Cast aluminium ergonomically designed body with powder coated ring. Superior reflector technology for high lux rendering.

Suitable for residential & architectural applications.


Beam Angle : 13° / 24° / 36° **CRI:** 80/90
Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
5W	500lm
15W	1500lm

Dia(x)	Ht(h)	Cutout
72	64	ø65
85	78	ø76



GLOW FX DL

Recessed Fix Downlight

Cast aluminium ergonomically deep designed body with powder coated ring with additional black colour reflector ring for glare free light effect.

Suitable for hotels, restaurants , residences & commercial applications.


Beam Angle : 36° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
5W	470lm
9W	850lm
12W	1150lm
15W	1425lm

Dia(x)	Ht(h)	Cutout
50	61	ø45
65	75	ø60
72	87	ø65
84	95	ø78



MERLIN



Recessed Fix Downlight

Die cast aluminium fixture with IP body. Merlin is also available in different beam angle Lenses options. Best suited for low Glare Installations due to Black chrome reflector. Suitable for premium residential, museums, hospitality, architectural & commercial applications.


Beam Angle : 18°/ 33°/ 50° **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
7W	630lm
12W	1080lm
20W	1800lm
30W	2850lm

Dia(x)	Ht(h)	Cutout
62	60	ø55
83	70	ø75
103	88	ø95
123	102	ø110



**Reflector Shades Available: Chrome Black, Matte White, Matte Black.*

AVIO DL

Recessed Fix Downlight

Designed with robust aluminium pressure die-cast heat sink and body, Dart ensures excellent thermal management and long-lasting durability.

Suitable for retail, commercial, and high-ceiling applications.

Beam Angle : 24° / 36° / 60° CRI: 80/90



Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
30W	3000lm
35W	3500lm
40W	4000lm
45W	4400lm

Dia(x)	Ht(h)	Cutout
114	122	ø104
114	122	ø104
114	122	ø104
114	122	ø104



DART

Recessed Fix Downlight

Designed with robust aluminium pressure die-cast heat sink and body, Dart ensures excellent thermal management and long-lasting durability.

Suitable for retail, commercial, and high-ceiling applications.

Beam Angle : 24° / 36° / 60° CRI: 80/90

Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	2750lm
30W	3300lm
35W	3600lm

Dia(x)	Ht(h)	Cutout
128	103	ø118
128	103	ø118
128	103	ø118



WADS


Recessed Fix Downlight

Heavy duty diecast IP65 fixture with adjustable mounting clip, suitable for different ceiling thickness and with convenience of dismounting the surface ring.

Suitable for Commercial showrooms, malls, warehouses, factories


Beam Angle : 45° CRI: 90

Driver : Non-Integrated.



Watt	Lumens
20W	1800lm
25W	2250lm
30W	2880lm
35W	3360lm

Dia(x)	Ht(h)	Cutout
123	93	ø110
123	93	ø110
145	106	ø130
145	106	ø130



WEGA


Recessed Fix Downlight

Wega is IP 65 downlighter made of die cast housing body with white frame and white reflector with honeycomb option.

Suitable for residential, hospitality and commercial lighting.


Beam Angle : 38° CRI: 90

Driver : Non-Integrated.



Watt	Lumens
10W	800lm
15W	1200lm
20W	1700lm
30W	2550lm

Dia(x)	Ht(h)	Cutout
90	68	ø75
110	80	ø95
110	80	ø95
140	95	ø115



ARCUS L

Recessed Fix Downlight

Lens with European optics offers benefits like excellent light distribution with a wide beam angle, high efficiency, a sleek design, good thermal performance making it suitable for applications requiring uniform & comfortable illumination without harsh glare, particularly in downlights.

Beam Angle : 18°/ 26°/ 36°/ 60° **CRI:** 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
15W	1500lm
25W	2500lm
40W	4000lm

Dia(x)	Ht(h)	Cutout
80	69	ø74
96	99	ø90
134	110	ø126



ARCUS DF

Recessed Diffused Fix Downlight

With Diffuser optics offers solution for soft diffused light.

Available in options of matt white & black reflectors. Suitable for office , residential and Hospitality applications.

Beam Angle : Diffused **CRI:** 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
15W	1425lm
25W	2350lm
40W	3800lm

Dia(x)	Ht(h)	Cutout
80	69	ø74
96	99	ø90
134	110	ø126




ZEUS 1X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.


Beam Angle : 30° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
5W	450lm

L(x)	B(b)	Ht(h)	Cutout
52	52	69	48 x 48



ZEUS 2X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.


Beam Angle : 30° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
10W	900lm

L(x)	B(b)	Ht(h)	Cutout
92	52	69	88 x 48



ZEUS 3X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 30° CRI: 80/90



Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
15W	1350lm

L(x)	B(b)	Ht(h)	Cutout
132	52	69	128 x 48

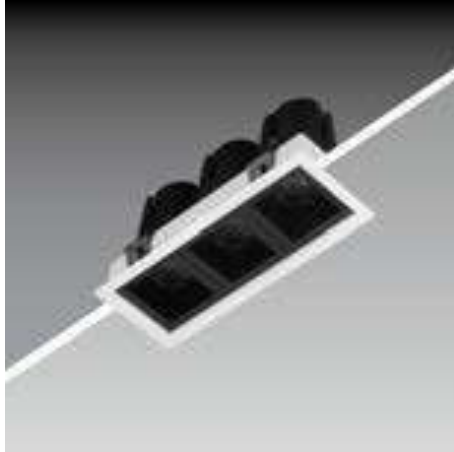

ZEUS 4X

Recessed Adjustable Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 30° CRI: 80/90



Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
20W	1800lm

L(x)	B(b)	Ht(h)	Cutout
92	92	69	88 x 88

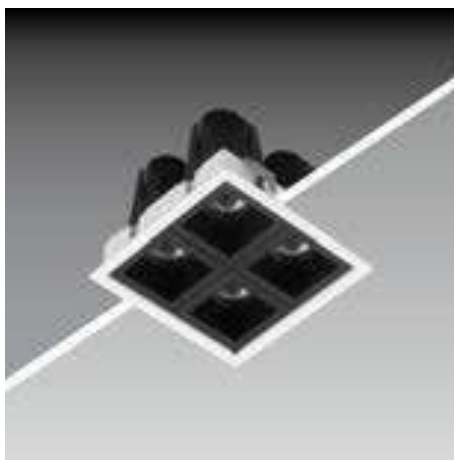

MINIS



Recessed Fixed Downlight

Unique gold colour fixed aluminium heat sink , offers smaller cutouts with options of different beam angles supported by versatile aesthetics of variety of colour reflectors.


Suitable for residential and hospitality solutions

Beam Angle : 18°/ 24°/ 36°/ 50° **CRI:** 90
Driver : Non-Integrated.



Watt	Lumens
6W	300lm
9W	650lm
12W	1050lm
15W	1275lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
39	95	ø35
50	100	ø45
60	105	ø55
60	105	ø55
70	124	ø65



MINIS



Trimless Fixed Downlight

Unique gold colour fixed aluminium heat sink , offers smaller cutouts with options of different beam angles supported by versatile aesthetics of variety of colour reflectors.


Suitable for residential and hospitality solutions.

Beam Angle : 18°/ 24°/ 36°/ 50° **CRI:** 90
Driver : Non-Integrated.



Watt	Lumens
6W	300lm
9W	650lm
12W	1050lm
15W	1275lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
53	95	ø35
62	100	ø45
84	105	ø55
84	105	ø55
100	124	ø65



*Reflector Shades Available: Matte Black, Matte White, Silver Chrome, Black Chrome, Gold.

Recessed Adjustable Downlight

Unique gold colour adjustable aluminium heat sink , offers smaller cutouts with options of different beam angles supported by versatile aesthetics of variety of colour reflectors.

Suitable for residential and hospitality solutions

Beam Angle : 18°/ 24°/ 36°/ 50° **CRI:** 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
6W	300lm
9W	650lm
12W	1050lm
15W	1275lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
39	95	ø35
50	100	ø45
60	105	ø55
60	105	ø55
70	124	ø65



Trimless Adjustable Downlight

Unique gold colour adjustable aluminium heat sink , offers smaller cutouts with options of different beam angles supported by versatile aesthetics of variety of colour reflectors.

Suitable for residential and hospitality solutions.

Beam Angle : 18°/ 24°/ 36°/ 50° **CRI:** 90

Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
6W	300lm
9W	650lm
12W	1050lm
15W	1275lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
53	95	ø35
62	100	ø45
84	105	ø55
84	105	ø55
100	124	ø65



**Reflector Shades Available: Matte Black, Matte White, Silver Chrome, Black Chrome, Gold.*

GLOW MINI

Recessed Adjustable Downlight

Designed for Shelf / Wall Wash light application. Reflector based optic for precise beam.

Application for shelf light in Jewellery Stores, hospitality & residential installations.


Beam Angle : 24°/ 36° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
3W	270lm

Dia(x)	Ht(h)	Cutout
60	55	ø54



GLEAM MINI

Recessed Adjustable Downlight

Designed for Shelf / Wall Wash light application. Reflector based optic for precise beam.

Application for shelf light in Jewellery Stores, hospitality & residential installations.


Beam Angle : 24°/ 36° **CRI:** 80/90

Driver : Non-Integrated.



Watt	Lumens
3W	270lm

Dia(x)	Ht(h)	Cutout
60	40	ø40



GLEAM

Recessed Adjustable Downlight

Cast aluminium body with powder coated ring. Superior reflector technology for high lux levels.


Best suited for shops, hotels , restaurants & residences

Beam Angle : 30° CRI: 80/90
Driver : Non-Integrated.



Watt	Lumens
6W	600lm
9W	900lm
14W	1400lm
18W	1800lm

Dia(x)	Ht(h)	Cutout
88	50	ø75
88	50	ø75
110	70	ø100
110	70	ø100



AVE



Recessed Adjustable Downlight

Aluminium die cast Unique designed housing which is adjustable but no light spillover from back side. Available with different Beam angles and colour reflectors.


Suitable for residential and hospitality applications

Beam Angle : 24°/ 36°/ 55° CRI: 90
Driver : Non-Integrated.



Watt	Lumens
7W	550lm
12W	1050lm
15W	1300lm

Dia(x)	Ht(h)	Cutout
62	73	ø55
84	93	ø75
84	93	ø75



ERICA L



Recessed Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations.

Suitable for residential, museums, hospitality, architectural, retail & commercial applications.


Beam Angle : 15°/ 24°/ 36° **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
6W	540lm
8W	720lm
12W	1080lm

Dia(x)	Ht(h)	Cutout
60	75	ø50
72	83	ø65
86	104	ø75



**Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.*

ERICA R



Recessed Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations.

Suitable for residential, museums, hospitality, architectural, retail & commercial applications.


Beam Angle : 15°/ 24°/ 36° **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
12W	1020lm
15W	1350lm
20W	1700lm
30W	2550lm

Dia(x)	Ht(h)	Cutout
86	104	ø73
106	119	ø95
106	119	ø95
132	145	ø120



**Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.*

Trimless Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations.

Suitable for residential, museums, hospitality, architectural, retail & commercial applications.

Beam Angle : 15°/ 24°/ 36° **CRI:** 90

Driver : Non-Integrated.


IP20

 WW
 NW
 CW

Watt	Lumens
6W	540lm
8W	720lm
12W	1080lm

Dia(x)	Ht(h)	Cutout
49	75	ø50
63	83	ø65
73	104	ø75

**Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.*



Trimless Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations.

Suitable for residential, museums, hospitality, architectural, retail & commercial applications.

Beam Angle : 15°/ 24°/ 36° **CRI:** 90

Driver : Non-Integrated.


IP20

 WW
 NW
 CW

Watt	Lumens
12W	1020lm
15W	1350lm
20W	1700lm
30W	2550lm

Dia(x)	Ht(h)	Cutout
73	104	ø73
92	119	ø95
92	119	ø95
117	145	ø120

**Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.*



COMET DL



Recessed Adjustable Downlight

Made of CF Aluminium body for better thermal specs and corrosion resistance. Comet delivers high lumens with precise beam control due to unique high quality aluminium (Alanod) reflector. Suitable for commercial and hospitality Solutions

Beam Angle : 16°/ 24°/ 36°/ 45°/ 60°



CRI: 80 / 90

Driver : Non-Integrated.



Watt	Lumens
15W	1800lm
18W	2200lm
20W	2400lm

Dia(x)	Ht(h)	Cutout
100	80	ø95
100	80	ø95
100	80	ø95



AXORA



Recessed Adjustable Downlight

Made of CF Aluminium body for better thermal specs and corrosion resistance.

Suitable for commercial, residential and hospitality Solutions

Beam Angle : 15°/ 24°/ 38°/ 45°/ 60°


CRI: 80 / 90

Driver : Non-Integrated.



Watt	Lumens
15W	1650lm
18W	1980lm

Dia(x)	Ht(h)	Cutout
100	80	ø95
100	80	ø95



Recessed Fixed Downlight

Made of CF Aluminium body for good thermal specs & corrosion resistance. The unique high efficiency Downlighter features high quality aluminium (Alanod) reflectors for precise light output & beam controls for extra punch & high lumen per watt. Suitable for Commercial applications.

Beam Angle : 16°/ 24°/ 36°/ 45°/ 60°

CRI: 80 / 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	3375lm
30W	4050lm
35W	4725lm

Dia(x)	Ht(h)	Cutout
104	126	ø95
104	126	ø95
104	126	ø95



Recessed Adjustable Downlight

Made of CF Aluminium body for good thermal specs & corrosion resistance. The unique high efficiency Downlighter features high quality aluminium (Alanod) reflectors for precise light output & beam controls for extra punch & high lumen per watt. Suitable for Commercial applications.

Beam Angle : 16°/ 24°/ 36°/ 45°/ 60°

CRI: 80 / 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	3375lm
30W	4050lm
35W	4725lm

Dia(x)	Ht(h)	Cutout
104	125	ø95
104	125	ø95
104	125	ø95



FLARE RD

Recessed Adjustable Downlight

Unique design fixture with cast aluminium heat sink powder coated ring. Swivel & tilt option for direction light & wall washing. Reflector designed for soothing light output.


Suitable for residential, office, hotel & restaurant lighting

Beam Angle : 15°/24°/36° / **CRI:** 80
Driver : Non-Integrated.



Watt	Lumens
5W	450lm
8W	720lm
12W	1080lm
15W	1350lm

Dia(x)	Ht(h)	Cutout
85	64	ø70
85	69	ø70
95	76	ø75
95	80	ø75



FLARE DR

Recessed Adjustable Downlight

Unique design fixture with cast aluminium heat sink powder coated ring. Swivel & tilt option for direction light & wall washing. Reflector designed for soothing light output.


Suitable for residential, office, hotel & restaurant lighting

Beam Angle : 15°/24°/36° / **CRI:** 80
Driver : Non-Integrated.



Watt	Lumens
5W	450lm
8W	720lm
12W	1080lm
15W	1350lm

Dia(x)	Ht(h)	Cutout
85	76	ø75
85	81	ø75
100	100	ø90
100	105	ø90



GLOW

Recessed Adjustable Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 24°/ 36° / **CRI:** 90


Driver : Non-Integrated.

IP20



Watt	Lumens
15W	1500lm
22W	2200lm

Dia(x)	Ht(h)	Cutout
110	82	ø75
110	97	ø94



GLAZE

Recessed Adjustable Downlight

Die Cast Aluminium housing with dark chrome reflector. Glare free deep recessed lens based optic for soft & soothing light.

Suitable for commercial , hospitality & residential solutions

Beam Angle : 24°/ 36° / **CRI:** 90


Driver : Non-Integrated.

IP20



Watt	Lumens
8W	750lm
10W	950lm
12W	1150lm

Dia(x)	Ht(h)	Cutout
70	77	ø65
70	77	ø65
88	88	ø80



**Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.*

BONA

Recessed Adjustable Downlight

Ultra thin die cast aluminium tiltable (20 degree) fixture with and with out Honeycomb for ceilings with lower space.

Suitable for retail & residential.


Beam Angle : 30° / CRI: 90

Driver : Non-Integrated.



Watt	Lumens
5W	425lm
5W(Honeycomb)	250lm

Dia(x)	Ht(h)	Cutout
85	34	ø75
85	34	ø75



ENZIO



Semi Recessed Adjustable Spotlight

Semi recessed Adjustable spotlight with die cast housing with options of multi colors. Enzo is multi angle adjustable and useful for different directions accent lighting requirements.

Suitable for residential, hospitality and retail.


Beam Angle : 36° / CRI: 90

Driver : Non-Integrated.



Watt	Lumens
12W	1080lm

Dia(x)	Ht(h)	Cutout
75	97	ø60



TUBUS-D S

Surface Fix Downlight

Made of CF Aluminium body for good thermal specs & Corrosion resistance.

The unique surface spotlight features high quality reflectors for precise light output & top colour secondary reflectors to reduce glare

Beam Angle : 45° **CRI:** 80/90

Driver : Integrated.

IP20

WW
NW
CW

Watt	Lumens
7W	630lm
12W	1050lm
15W	1350lm
20W	1800lm

Dia(x)	Ht(h)
65	80
75	105
75	105
75	120

**Reflector Shades Available: Black, White, Gold, Rose Gold, Black Chrome, Silver Chrome.*



TUBUS-D L

Diffused Surface Fix Downlight

Made of CF Aluminium body for good thermal specs & Corrosion resistance.

The unique surface spotlight features high quality reflectors for precise light output & top colour secondary reflectors to reduce glare

Beam Angle : 15°/ 24°/ 36° **CRI:** 80/90

Driver : Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	2250lm
30W	2700lm
35W	3150lm
40W	3600lm

Dia(x)	Ht(h)
94	150
94	150
114	150
114	150

**Reflector Shades Available: Black, White, Gold, Rose Gold, Black Chrome, Silver Chrome.*



COMET SF S



Surface Fix Downlight

Made of CF Aluminium body for good thermal specs & Corrosion resistance. The unique high efficiency surface spotlight features high quality Aluminium (Alanod) reflectors for precise light output & beam controls for extra punch & high lumen per watt. Suitable for Commercial applications.

Beam Angle : 24°/ 36°/ 45°/ 60°

CRI: 80 / 90


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
12W	1440lm
15W	1800lm
18W	2160lm
20W	2400lm

Dia(x)	Ht(h)
75	105
75	105
75	120
75	120



COMET SF L



Surface Fix Downlight

Made of CF Aluminium body for good thermal specs & Corrosion resistance. The unique high efficiency surface spotlight features high quality Aluminium (Alanod) reflectors for precise light output & beam controls for extra punch & high lumen per watt. Suitable for Commercial applications.

Beam Angle : 24°/ 36°/ 50°/ 60°

CRI: 80/90

Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	2750lm
30W	3300lm
35W	3800lm
40W	4400lm

Dia(x)	Ht(h)
94	150
94	150
114	150
114	150



TUBUS-D DF

Surface Diffused Fix Downlight

Made of CF Aluminium body for good thermal specs & Corrosion resistance.
The unique surface fixture with diffuser applicable for application for soft diffused light with wide beam .

Suitable for office, commercial & hotel lighting.

Beam Angle : 24°/ 36°/ 45°/ 60°

CRI: 80

Driver : Non-Integrated.



Watt	Lumens
12W	1200lm
15W	1500lm
18W	1800lm
20W	2000lm

Dia(x)	Ht(h)
75	105
75	105
94	120
94	120



NERO

Diffused Surface Fix Downlight


Made of die cast aluminium for good corrosion resistance and heat dissipation.
IP65 rated .

Suitable for residential, hospitality and commercial applications

Beam Angle : 24°/ 36°/ 50°

CRI: 80

Driver : Non-Integrated.



Watt	Lumens
12W	1320lm
15W	1650lm
20W	2200lm
30W	3300lm

Dia(x)	Ht(h)
80	90
80	90
100	100
130	130





Trackspot Wallwasher

Track lights can be used to highlight important features in a home. They're perfect for lighting artwork, photos, or unique architectural elements that you might have. You can also position them to illuminate dark corners of rooms that ambient or natural light isn't able to reach.

Wall washing illuminates a vertical surface with uniform brightness. Wall washing draws attention to the wall, and can be used to accentuate an entrance, fireplace, or artwork. The light reflected from matte surface walls can make a room appear bright and will provide a soft, diffuse light in the room.

AVIO NX

Recessed Adjustable Wallwasher

Cast Aluminium housing white powder coating. Recessed Spot with zoom tilt for wall illumination & focussed downlight applications. Optimized heat sink design gives better thermal management to ensure long lifetime. Suitable for retail, commercial and high ceiling applications.


Beam Angle : 24°/ 40°/ 60° **CRI:** 80/90
Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	2750lm
30W	3300lm
35W	3850lm
40W	4400lm

Dia(x)	Ht(h)	Cutout
136	100	ø130
136	100	ø130
156	118	ø150
156	118	ø150



AVIO NX SQ 1X

Recessed Adjustable Wallwasher

Square zoom big 1XSQ1 Energy efficient LED spot light Luminaire elegant square look PDC frame having swivelling of heatsink to adjust beam Horizontal 0°-350° & Vertical 0° - 45°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 24°/ 40°/ 60° **CRI:** 80/90
Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
25W	2750lm
30W	3300lm
35W	3850lm
40W	4400lm

L(x)	B(b)	Ht(h)	Cutout
150	150	107	137 x 137
150	150	107	137 x 137
150	150	107	137 x 137
150	150	107	137 x 137



AVIO NX SQ 2X

Recessed Adjustable Wallwasher


Square zoom big 2XSQ1 Energy efficient LED spot light Luminaire elegant square look PDC frame having swivelling of heatsink to adjust beam Horizontal 0°-350° & Vertical 0° - 45°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 15°/ 24°/ 38°/ 60° **CRI:** 80/90
Driver : Non-Integrated.



Watt	Lumens
25W x 2	2 x 2750lm
30W x 2	2 x 3300lm
35W x 2	2 x 3850lm
40W x 2	2 x 4400lm

L(x)	B(b)	Ht(h)	Cutout
300	150	107	287 x 137
300	150	107	287 x 137
300	150	107	287 x 137
300	150	107	287 x 137



DELTA

Recessed Adjustable Wallwasher

Good architectural lighting puts the focus on people and their visual tasks. This presupposes precise light control. The optical cut-off up to 40° achieves maximum visual comfort and glare-free lighting enjoyment.

Beam Angle : 24°/ 36°/ 60° **CRI:** 80/90
Driver : Non-Integrated.



Watt	Lumens
20W	2100lm
25W	2625lm
30W	3150lm
35W	3625lm

Dia(x)	Ht(h)	Cutout
132	108	ø123
132	108	ø123
145	147	ø139
145	147	ø139



PICSEL



Recessed Wallwasher

Picseel Wallwasher comes with polarized optics with Side mounted LED source with soft & uniform light after secondary reflection , accurately illuminating the wall.

Picseel supports bottom replacement and 360 degree Horizontal free rotation.


Suitable for commercial installations.

Beam Angle : Assymetrical **CRI:** 90
Driver : Non - Integrated.



Watt	Lumens
12W	880lm
20W	1750lm

Dia(x)	Ht(h)	Cutout
80	84	ø75
105	110	ø95



TUBUS-D WW

Surface Fixed Wallwasher

Made of CF Aluminium body for good thermal specs & Corrosion resistance.

The unique surface wall washer helps wall wash & highlight objects & portraits on wall, where false ceiling is not possible.

Beam Angle : 19°/ 25°/ 45°/ 77° **CRI:** 80/90
Driver : Non-Integrated.



Watt	Lumens
18W	1250lm

Dia(x)	Ht(h)
75	120



OCTA SF

Surface Adjustable Wallwasher

Unique premium designed light fixture. Made of aluminium housing , powder coated finish with a premium reflector for a bright punch with a black front ring to reduce glare. Available in Black & White powder finish. Perfect Choice for Retail & Shop lighting applications.

Beam Angle : 19°/ 25°/ 45°/ 77° **CRI:** 80/90
Driver : Non-Integrated.



Watt	Lumens
15W	1500lm
18W	1800lm
21W	2100lm
25W	2500lm

Dia(x)	Ht(h)
83	131
83	131
83	131
83	131



OCTA

Track Spotlight


Robust Construction with Aluminium die cast body. Better thermal management ensuring longer life due to separate driver from luminaire & optimized heat sink design. Fixture has smooth 90 ° swivel with 350° rotation. Perfect Choice for Retail & Shop lighting applications.

Beam Angle : 19°/ 25°/ 45°/ 77° **CRI:** 80/90
Driver : Non-Integrated.



Watt	Lumens
15W	1500lm
18W	1800lm
21W	2100lm
25W	2500lm

Dia(x)	Ht(h)
83	131
83	131
83	131
83	131



COMET

PRO

Track Spotlight

The powerful spotlight varied beam angles ensure pinpoint, powerful, and energy-efficient illumination. High colour-rendering values create ideal lighting conditions for presentation, beyond simply in retail Shoppes, Showrooms & Malls.


Beam Angle : 19°/ 24°/ 36°/ 60° **CRI:** 90
Driver : In-Track Driver.

IP20

 WW
 NW
 CW

Watt	Lumens
20W	2600lm
25W	3250lm
30W	3900lm
35W	4200lm

Dia(x)	Ht(h)
80	100
80	100
90	130
90	130



VISTA

Track Spotlight

Perfect track light with Inbuilt driver and made of high quality aluminium outer body with an appropriate high quality HEAT SINK to cater to utility stores and track spot applications. Suitable for shops, showrooms and malls.


Beam Angle : 24°/ 38°/ 60° **CRI:** 80/90
Driver : Integrated.

IP20

 WW
 NW
 CW

Watt	Lumens
18W	1800lm
30W	3000lm
35W	3500lm
40W	4000lm

Dia(x)	Ht(h)
60	160
80	200
80	220
80	220



CANE

Track Spotlight

Unique premium designed track light fixture. Made of aluminium housing , powder coated finish with a premium reflector for a bright punch with a black front ring to reduce glare. Available in Black & White powder finish. Perfect Choice for Retail & Shop lighting applications.

Beam Angle : 38°/ 45°/ 60° **CRI:** 80/90
Driver : Non-Integrated.

IP20


WW

NW

CW

Watt	Lumens
7W	700lm
12W	1200lm
20W	2000lm
30W	3000lm

Dia(x)	Ht(h)
50	110
60	125
80	153
90	175



GLOW

Track Spotlight

Unique premium designed track fixture. Made of die cast aluminium, powder coated finish with superior reflector and LED COB. Compatible with 3-circuit power track. Consistency of colour temperature.

Beam Angle : 24°/ 36° **CRI:** 80/90
Driver : Integrated.

IP20


WW


NW

CW

Watt	Lumens
18W	1800lm
35W	3500lm

Dia(x)	Ht(h)
80	128
113	147



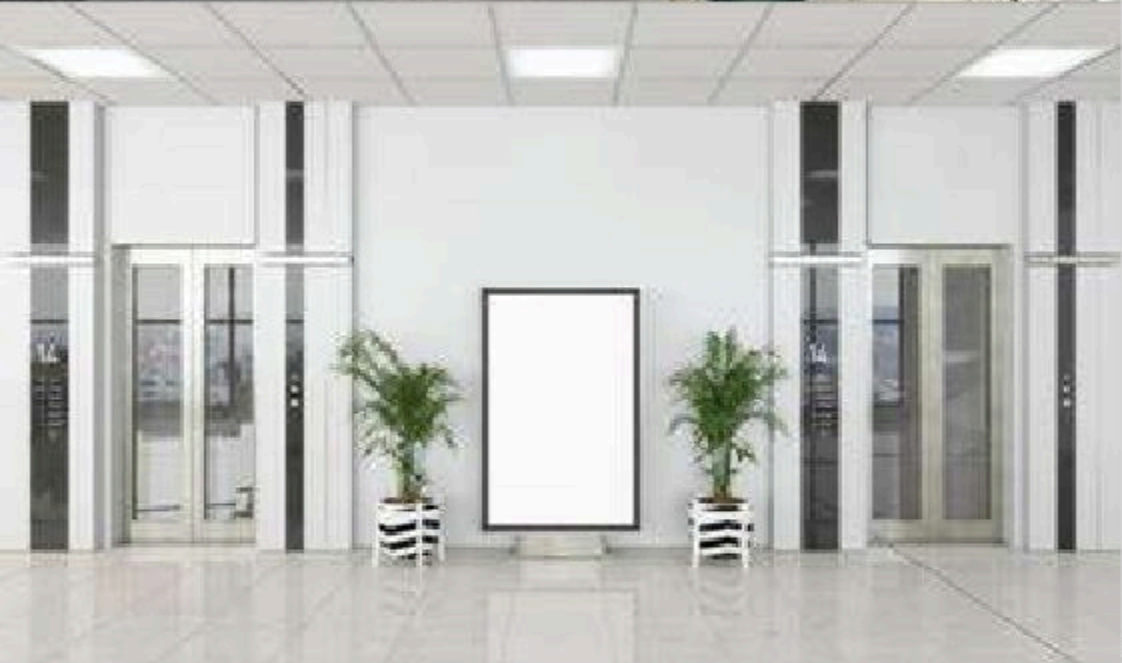

Panel Lights

Grid lights

LED Panel Lights are Ceiling lights which can be circular or square in shape. They produce bright illumination through LEDs. LED Panels can be recessed, surface mounted or suspended from the ceiling. Panel lighting is designed for both residential and commercial applications. This type of lighting fixture is made to replace conventional fluorescent ceiling lights, and designed to mount on suspended grid ceilings or recessed ceilings.

Lighting of a room or building by means of flat sheets of material that glow brightly when a coating of a phosphor is excited by an electrical charge. LED panel lights are some of the most efficient lighting options in the market. They have grown in popularity and are used widely because of their energy-efficiency, and can save more than 80% of energy while producing brighter and softer light than their traditional counterparts.

BRILLO 2 X 2

Recessed LED Panel Light

Spotless, uniform, soft and bright diffused illumination. Best suited for use as ambient light in office and commercial application.
Can be recessed in a gypsum ceiling or integrated with a modular grid ceiling.


Beam Angle : 120° / **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
36W	3600lm

L(x)	B(b)	Ht(h)	Cutout
595	595	55	575 X 575



BRILLO 4 X 1

Recessed LED Panel Light

Spotless, uniform, soft and bright diffused illumination. Best suited for use as ambient light in office and commercial application.
Can be recessed in a gypsum ceiling or integrated with a modular grid ceiling.


Beam Angle : 120° / **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
36W	3600lm

L(x)	B(b)	Ht(h)	Cutout
329	1200	55	1185 x 308




BOLT ROUND

Recessed LED Panel Light

Symmetrical in a round profile, our Bolt series is a perfect choice for diffused lighting and a relaxing atmosphere. A favoured choice among the downlights family, these can be seamlessly installed across high or low ceilings.

Beam Angle : 110° / **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
10W	1000lm
15W	1500lm
20W	2000lm
25W	2500lm

Dia(x)	Ht(h)	Cutout
150	40	ø135
150	40	ø135
150	40	ø135
150	40	ø135


BOLT SQUARE

Recessed LED Panel Light

Symmetrical in a square profile, our Bolt series is a perfect choice for diffused lighting and a relaxing atmosphere. A favoured choice among the downlights family, these can be seamlessly installed across high or low ceilings.

Beam Angle : 110° / **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
10W	1000lm
15W	1500lm
20W	2000lm
25W	2500lm

L(x)	B(b)	Ht(h)	Cutout
152	152	40	135 x 135
152	152	40	135 x 135
152	152	40	135 x 135
152	152	40	135 x 135

BEZEL ROUND

Recessed LED Panel Light

Recessed Mounted Backlit Panel of Polycarbonate Housing & milky acrylic diffuser.
Wide beam angle of 120°.


Suitable for Residences & shops

Beam Angle : 120° / **CRI:** 80
Driver : Integrated.



Watt	Lumens
8W	750lm
15W	1500lm
20W	2000lm

Dia(x)	Ht(h)	Cutout
116	38	ø100
166	38	ø150
220	38	ø205



BEZEL SQUARE

Recessed LED Panel Light

Recessed Mounted Backlit Panel of Polycarbonate Housing & milky acrylic diffuser.
Wide beam angle of 120°.



Suitable for Residences & shops

Beam Angle : 110° / **CRI:** 80
Driver : Integrated.



Watt	Lumens
8W	750lm
15W	1500lm
20W	2000lm

L(x)	B(b)	Ht(h)	Cutout
116	116	38	100 x 100
166	166	38	150 x 150
220	220	38	205 x 205

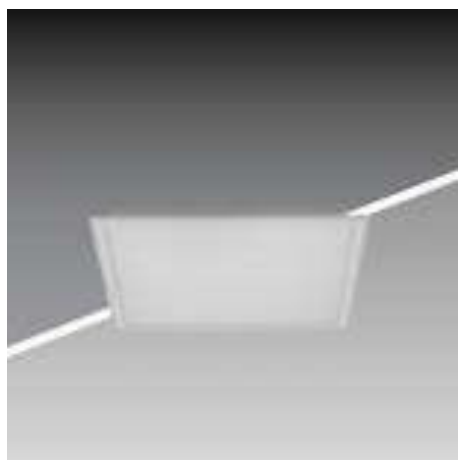

PLANO ROUND

Recessed LED Panel Light

The sleek, aluminium casting with powder coating is perfect for areas where the inside ceiling height is a constraint.
Ideal for residential application with less ceiling space.


Beam Angle : 120° / **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
10W	900lm
15W	1350lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
120	25	ø105
170	25	ø155
225	25	ø210



PLANO SQUARE

Recessed LED Panel Light

The sleek, aluminium casting with powder coating is perfect for areas where the inside ceiling height is a constraint.
Ideal for residential application with less ceiling space.



Beam Angle : 120° / **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
10W	900lm
15W	1350lm
20W	1800lm

L(x)	B(b)	Ht(h)	Cutout
120	120	25	105 x 105
170	170	25	105 x 105
225	225	25	210 x 210

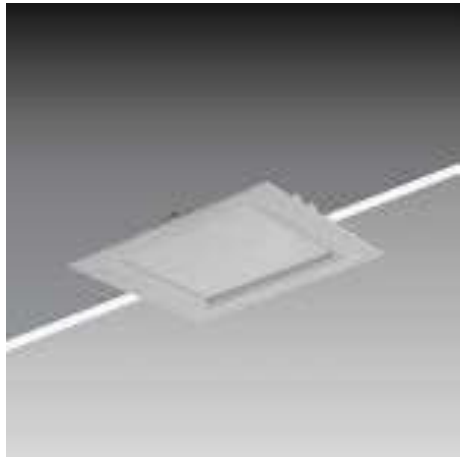

VERVE S ROUND

Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring deep recess frame. Available in White & Black frame. Diffuser light gives a glare free but bright light effect. Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 110° / CRI: 80


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
12W	1050lm
18W	1650lm
24W	2200lm

Dia(x)	Ht(h)	Cutout
120	49	ø110
154	54	ø144
175	55	ø165



VERVE S SQUARE

Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring deep recess frame. Available in White & Black frame. Diffuser light gives a glare free but bright light effect. Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 110° / CRI: 80


Driver : Non-Integrated.

IP20

WW
NW
CW

Watt	Lumens
12W	1050lm
18W	1650lm

L(x)	B(b)	Ht(h)	Cutout
110	110	50	100 x 100
145	145	55	135 x 135



VIVA


Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring with partial recess frame. Diffuser light gives a glare free but bright light effect.

Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 120° / CRI: 80

Driver : Non-Integrated.



IP20

WW

NW

CW

Watt	Lumens
5W	450lm
10W	1000lm
15W	1500lm
20W	2000lm

Dia(x)	Ht(h)	Cutout
85	45	ø70
110	44	ø90
166	44	ø140
190	46	ø160

LUNA


Surface LED Panel Light

Surface led downlight for ceiling that comes in colours: Warm White, Natural White & Cool Daylight.

The surface downlighter has a strong and high-quality LED light output that can be a great choice for your living room, corridor and for display in shops.

Beam Angle : 120° / CRI: 80

Driver : Integrated.



IP20

WW

NW

CW

Watt	Lumens
12W	1080lm
18W	1620lm
24W	2160lm

Dia(x)	Ht(h)
120	36
150	36
200	36



Linear Cove lights

Linear lighting is defined as a linear shape luminaries (opposed to square or round). These luminaries long optics to distribute the light over a more narrow area than with traditional lighting. Linear light fixtures can be installed in three main ways - mounted on surfaces, suspended in air, or built into, or 'recessed' in, surfaces. Regardless, they are a popular choice in many spaces, such as offices, retail malls and more.


Cove lighting is a form of indirect lighting built into ledges, recesses, or valances in a ceiling or high on the walls of a room. It directs light up towards the ceiling and down adjacent walls. These lights effortlessly grant a glow to your space and serve as an indirect source of lighting. Moreover, they appear diffused and muted overall. The best thing about cove lighting is also that you can include them easily in your ceiling design and they are easy to maintain.

LYNQ

Recessed LED Linear Downlight

Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.

Beam Angle : 24°/ 36° **CRI:** 80
Driver : Non-Integrated.



Watt	Lumens
8W	750lm
15W	1400lm

L(x)	B(b)	Ht(h)	Cutout
95	45	50	87 x 37
175	45	50	165 x 37




FILA SURFACE

Surface LED Linear Light

Extruded aluminium profile with white/black or any other housing color as per choice. Standard length of 1190mm and can be customised in any length. Built-in driver makes it easy to install. Bottom down maintenance.

Beam Angle : Diffused **CRI:** 80
Driver : Non-Integrated.



Model	Watt	Lumens
3535	30W	3000lm
5272	30W	3000lm
9580	30W	3000lm

L(x)	B(b)	Ht(h)
1190	35	35
1190	52	72
1190	95	80



FILA RECESSED

Recessed LED Linear Light

Extruded aluminium profile with white/black or any other housing color as per choice. Standard length of 1200-1210mm and can be customised in any length. Built-in driver makes it easy to install. Bottom down maintenance.

Beam Angle : Diffused **CRI:** 80

Driver : Non-Integrated.

IP20

WW
NW
CW



Model	Watt	Lumens
4540	30W	3000lm
7040	30W	3000lm
9065	30W	3000lm

L(x)	B(b)	Ht(h)	Cutout
1200	45	40	1190 x 35 x 40
1205	70	40	1190 x 55 x 40
1210	95	65	1190 x 75 x 65

FILA PENDANT

Suspended LED Linear Light

Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.

Beam Angle : Diffused **CRI:** 80

Driver : Non-Integrated.

IP20

WW
NW
CW



Model	Watt	Lumens
3535	20W	2000lm
5272	25W	2500lm
7490	35W	3500lm

L(x)	B(b)	Ht(h)
1224	35	35
1224	52	72
1224	74	90

LASER LINE RS

Recessed Linear Downlight

Introducing LASER LINE, Aluminum Extruded housing duly powder coated with high grade coating, a masterclass in recessed linear lighting.

This high-performance architectural downlight combines sleek, minimalist design.

Beam Angle : 15°/ 30°/ 45° **CRI:** 80
Driver : Non-Integrated.

IP20


WW

NW

CW

Watt	Lumens
9W	750lm
12W	1080lm
20W	1800lm

L(x)	B(b)	Ht(h)	Cutout
405	47	40	400 x 37
537	47	40	532 x 37
802	47	40	797 x 37

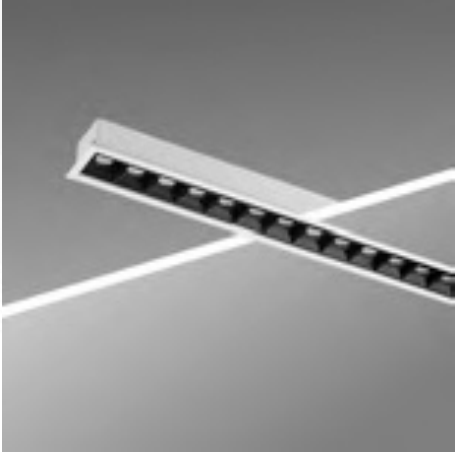

LASER LINE RL

Recessed Linear Downlight

Introducing LASER LINE, Aluminum Extruded housing duly powder coated with high grade coating, a masterclass in recessed linear lighting.

This high-performance architectural downlight combines sleek, minimalist design.

Beam Angle : 15°/ 30°/ 45° **CRI:** 80
Driver : Non-Integrated.

IP20


WW

NW

CW

Watt	Lumens
30W	2700lm
38W	3420lm
45W	4050lm
60W	5400lm

L(x)	B(b)	Ht(h)	Cutout
1200	47	40	1195 x 37
1592	47	40	1592 x 37
1995	47	40	1990 x 37
2392	47	40	2387 x 37

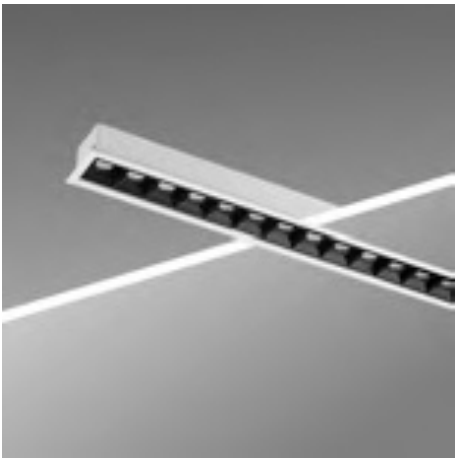

LASER LINE SS

Surface Linear Downlight

Introducing LASER LINE, Aluminum Extruded housing duly powder coated with high grade coating, a masterclass in recessed linear lighting.

This high-performance architectural downlight combines sleek, minimalist design.

Beam Angle : 15°/ 30°/ 45° **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
9W	750lm
12W	1080lm
20W	1800lm

L(x)	B(b)	Ht(h)
405	35	70
537	35	70
802	35	70

LASER LINE SL



Surface Linear Downlight

Introducing LASER LINE, Aluminum Extruded housing duly powder coated with high grade coating, a masterclass in recessed linear lighting.

This high-performance architectural downlight combines sleek, minimalist design.

Beam Angle : 15°/ 30°/ 45° **CRI:** 80

Driver : Non-Integrated.



Watt	Lumens
30W	2700lm
38W	3420lm
45W	4050lm
60W	5400lm

L(x)	B(b)	Ht(h)
1200	35	70
1592	35	70
1995	35	70
2392	35	70

SPAN

Surface LED T5 Tubelight

A highly efficient replacement for T5 tubelight with energy savings of upto 50%.Sleek and elegant housing with built-in driver.Ideal for both domestic and commercial applications. Up to 20 fixtures linkable in series without dark patch.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.



Watt	Lumens
10W	1000lm
20W	2000lm

L(x)	B(b)	Ht(h)
600	20	30
1200	20	30



NEON FLEX

Surface LED Aluminium Profile


LED Flexible Neon Light is basically housed in the plastic jacket which could be transparent, opalescent, semi-transparent or transparent colour and the LED could be Red, Orange, Blue, Yellow, Green, Amber, White, Pink and Purple etc.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.



Watt / Mtr	Lumens / Mtr
8W	800lm
12W	960lm
18W	1440lm
12W	960lm

L(x)	B(b)	Ht(h)
5000	12	6
5000	14	14
5000	16	16
5000	20	10



ALLOY RECESSED

Recessed LED Aluminium Profile

The aluminium profiles are in anodized aluminium. The Flexible led strips can be glued into the profile.
The profile can simply be sawn to any required length or ordered in the required custom length.




Beam Angle : Diffused / **CRI:** 80
Driver : Non-Integrated.

IP20

WW

NW

CW



Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1500lm
24W	1700lm

L(x)	B(b)	Ht(h)
5000	13	10
5000	13	10
5000	13	10
5000	13	10

ALLOY SURFACE

Surface LED Aluminium Profile

The aluminium profiles are in anodized aluminium. The Flexible led strips can be glued into the profile.
The profile can simply be sawn to any required length or ordered in the required custom length.




Beam Angle : Diffused / **CRI:** 80
Driver : Non-Integrated.

IP20

WW

NW

CW



Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1500lm
24W	1700lm

L(x)	B(b)	Ht(h)
5000	20	10
5000	20	10
5000	20	10
5000	20	10

ALLOY CORNER

Surface Corner Aluminium Profile


Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.

Beam Angle : 24°, 36° / **CRI:** 80
Driver : Non-Integrated.



Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1350lm
24W	1700lm

L(x)	B(b)	Ht(h)
5000	16	16
5000	16	16
5000	16	16
5000	16	16



SERIE 2835

Suspended LED Linear Light

Impressive in dimension and incredibly light, Serie series packs high illumination in a small package: with 120 LEDs studded per metre. These strip lights enrich the architectural lighting family with their warming comfort.

Beam Angle : Assymetric / **CRI:** 80
Driver : Non-Integrated.



Watt / Mtr	Lumens / Mtr
5W	430lm
12W	960lm
18W	1500lm
24W	2000lm

L(x)	B(b)
5000	10
5000	10
5000	10
5000	10







MGT-23

Magnetic series

Magnetic Lighting is a low voltage system for indoor lighting. It consists of an assembly that can hold various light sources while using magnetic attraction. The magnetic track lighting system can have various lengths, shades and sizes. A magnet track can support different led lights, so it can be used in a wider range of applications. It can slide to any position easily without any auxiliary tools. Magnetic track light is a combined product, mainly composed of three parts: track, light body and switching power supply. Through the magnetic technology, the lamp components are adsorbed on the track.

The magnetic track is generally DC48V safety voltage, under normal circumstances, harmless to humans.

MGT23 - TS

Magnetic Cylinder Trackspot

The Magnetic track spotlights are based on LED track lights with track heads with magnets, with low-voltage DC48V input. The Spot fixture is made of die cast aluminium with built in DCDC converters.

Suitable for kitchen room, dining room, and wall washer lighting.

Beam Angle : 24° / CRI: 90


Driver : Track Integrated

IP20

WW
NW
CW

Watt	Lumens
5W	500lm
10W	1000lm
15W	1500lm
24W	2400lm

Dia(x)	Ht(h)
35	80
45	100
55	120
65	140



MGT23 - RS

Magnetic Sphere Trackspot

Die cast aluminium round magnetic spotlight with focussed spotlight. Swivel option for more flexibility and better options to highlight the space or subject illumination.

Suitable for interiors illumination and focusing on subjects.

Beam Angle : 24° / CRI: 90


Driver : Track Integrated

IP20

WW
NW
CW

Watt	Lumens
12W	1200lm

Dia(x)	Ht(h)
110	100

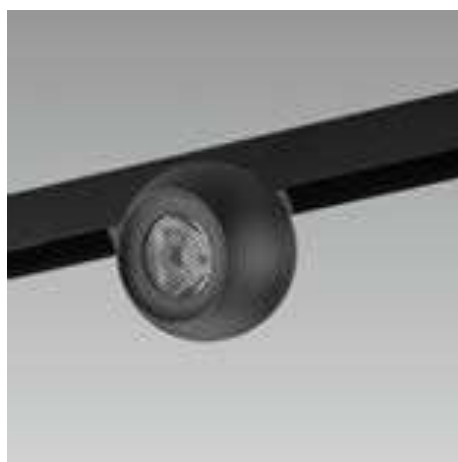

MGT23 - WWG

Magnetic Grill Wallwasher

Magnetic die cast aluminium wallwasher is adjustable spotlight is designed as grid spotlight. It is adjustable to required degree & can also be used as 90° adjustment as non-directional lighting. DALI/Smart dimmable options available.

Beam Angle : 24° / **CRI:** 90
Driver : Track Integrated



IP20

WW

NW

CW



Watt	Lumens
6W	600lm
12W	1200lm

L(x)	B(b)	Ht(h)
112	23	113
220	23	113

MGT23 - FXG

Magnetic Fixed Grill Downlight

The magnetic die cast aluminium grid spotlight is a directional lighting fixture with grill lens-based reflector with high CRI led. Suitable for use with magnetic line lights as basic lighting in the living room, dining room, corridor, etc.

Beam Angle : 24° / **CRI:** 90
Driver : Track Integrated



IP20

WW

NW

CW



Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm
24W	2400lm
36W	3600lm
54W	5400lm

L(x)	B(b)	Ht(h)
112	23	45
220	23	45
328	23	45
436	23	45
652	23	45
976	23	45

MGT23 - DWW

Magnetic Diffused Wallwasher

Magnetic linear diffuser adjustable die cast aluminium fixture with front PMMA diffuser. It has a wide distribution of 120° beam angle & high CRI. Suitable for wide spread focussing on Walls or structures or for general lighting in large spaces like halls, living rooms, offices, etc.


Beam Angle : Diffused / **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm

L(x)	B(b)	Ht(h)
112	23	113
220	23	113
328	23	113



MGT23 - FXD

Magnetic linear Fixed Diffused

Magnetic linear diffuser die cast aluminium fixture with front PMMA diffuser. It has a wide distribution of 120° beam angle & high CRI for general lighting in large spaces like living rooms, offices, etc. with high CRI.


Beam Angle : Diffused / **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm
24W	2400lm
36W	3600lm
54W	5400lm

L(x)	B(b)	Ht(h)
112	23	45
220	23	45
328	23	45
436	23	45
652	23	45
976	23	45

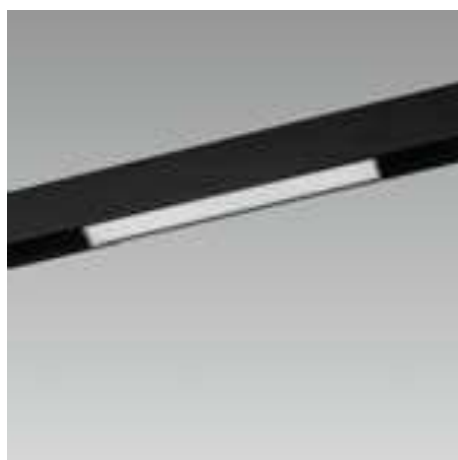

MGT23 - PDT RD

Magnetic Sphere Pendant

The magnetic die cast aluminium round sphere shape pendant light is with hanging ropes for suspended installation as decorative lighting. It is generally used as auxiliary lighting and is mostly used in the room corners, bedside table, etc.

Beam Angle : 24° / CRI: 90

Driver : Integrated



IP20	WW
	NW
	CW

Watt	Lumens
12W	1200lm

Dia(x)	Ht(h)
110	100

MGT23 - DECO

Magnetic Decorative Pendant

The magnetic pendant light is a cylinder downlight with hanging ropes for suspended installation as decorative lighting & is made of die cast aluminium and glass. It spreads diffused light around 360D due to diffused glass.

Beam Angle : 24° / CRI: 90

Driver : Integrated



IP20	WW
	NW
	CW

Watt	Lumens
7W	700lm

Dia(x)	Ht(h)
40	300

MGT23 - PDT N

Magnetic Decorative Pendant

The magnetic pendant light is a die cast aluminium cylinder downlight with hanging ropes for suspended installation as decorative lighting. It is generally used as auxiliary lighting and is mostly used in the study room, bedside table / dining table or above the commercial billing counters.


Beam Angle : 24°, 36° / **CRI:** 90

Driver : Non-Integrated.



Watt	Lumens
10W	1000lm

Dia(x)	Ht(h)
50	300



MGT23 - PDT D

Magnetic Decorative Pendant

The magnetic pendant light is a two step light source cylinder downlight with hanging ropes for suspended installation as decorative lighting. It is generally used as ambience pendant light and is mostly used in the study room, room corners, and above the dining table.


Beam Angle : Diffused / **CRI:** 90

Driver : Non-Integrated.




Watt	Lumens
10W	1000lm

Dia(x)	Ht(h)
60	320



MAGNETIC TRACKS




TRIMLESS



RECESSED



DEEP SURFACE



LOW SURFACE

MAGNETIC TRACKS ACCESSORIES



Power Head



Straight Joint



Flexible Joint



L Joint Surface



L Joint Recessed



Suspension Kit



Adapter Long



Adapter Small

*4 Wire Track. *Available Color - Black.

*Available in 1Mtr./ 2Mtr. Length



Landscape Lighting

Landscape Lighting refers to a specialized family of outdoor luminaires designed to enhance the beauty, safety, and functionality of exterior environments. These fixtures are engineered with robust, weather-resistant housings to protect internal components from moisture and dust. Primarily used to integrate architecture with nature, they are easily installed using ground stakes or surface mounts to illuminate gardens, paths, and building perimeters.

Modern landscape fixtures typically utilize low-voltage LED or COB technology, offering a safe and energy-efficient alternative to traditional systems. They provide a range of layered illumination, from soft ambient washes to directional accents, with a lifespan reaching tens of thousands of hours. This durability ensures consistent performance in harsh outdoor conditions, making them a sustainable choice for both residential and commercial projects.

VERSA

Surface Adjustable Wallwasher

Cylindrical shell design , die cast aluminium and polycarbonate lamp housing.

Lamp body can me rotated and directed to options to the top, middle or below (bidirectional or unidirectional)


Beam Angle : Diffused / **CRI:** 80

Driver : Integrated.



Watt	Lumens
13W	1200lm

Dia(x)	L(l)	Ht(h)
105	223	130



BLOOM

Surface Up/Down Wallwasher

Rectangular shell design ,die cast aluminium body around the diffuser, hollow design in the middle.

Suitable for wall mounted landscape outdoors.

Beam Angle : Diffused / **CRI:** 80

Driver : Integrated.



Watt	Lumens
7W	600lm
13W	1200lm

L(l)	B(x)	Ht(h)
175	64	83
248	70	115



TERRA

Surface Up/Down Wallwasher

Rectangular design COB Up-Down in die cast aluminium.

Suitable for Wall mounted IP65 rated landscape solution

Beam Angle : Diffused / **CRI:** 80
Driver : Integrated.

IP65

WW
NW
CW

Watt	Lumens
7W	600lm
11W	1200lm

Ht(h)	B(x)	W(y)
162	90	96
200	90	96



TWIST

Surface Up/Down Wallwasher

Die cast aluminium alloy material with anti corrosion and anti UV coating with tempered glass for UP-Down ight beams.

Suitable for Wall mounted IP65 rated landscape solution


Beam Angle : Diffused / **CRI:** 80
Driver : Integrated.

IP65

WW
NW
CW

Watt	Lumens
11W	1000lm

Ht(h)	B(x)	W(y)
200	90	40




MAPLE

Surface Up/Down Wallwasher

Die cast aluminium housing with tempered glass for UP-Down light beams.



Suitable for Wall mounted IP65 rated landscape solution

Beam Angle : Diffused / **CRI:** 80
Driver : Integrated.



Watt	Lumens
6W	600lm

Ht(h)	B(x)	W(y)
200	90	57

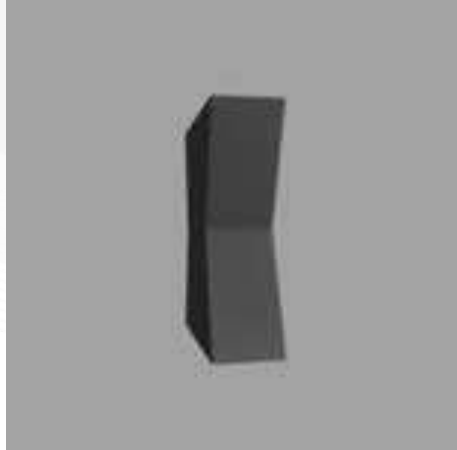


OAK

Surface Up/Down Wallwasher

Round shape Die cast housing with polished finish along with round tempered glass. Anti corrosive and anti UV powder coating.


Suitable for Wall mounted IP54 rated landscape solution

Beam Angle : Diffused / **CRI:** 80
Driver : Integrated.



Watt	Lumens
7W	600lm

Dia(x)	Ht(h)
140	60



**Other CCT Available as per request.*

PATHOS

Wall Recessed Path Light

Passage or corner lamp in two sizes installed inside the wall .

Suitable for wall recessed IP54 solutions for pathways.


Beam Angle : Diffused / **CRI:** 80

Driver : Integrated.



Watt	Lumens
4W	270lm
7W	540lm

Ht(h)	B(x)	W(y)
148	89	58
220	123	90



CUBE

Surface Wall Top Light

Cube design has a milky white lamp diffuser surrounded by a layer of ladder shape wrapping. Combination of Aluminium die cast and polycarbonate for IP 65 protection. Suitable for wall top mounted boundary walls and gates of villas and compounds


Beam Angle : Diffused / **CRI:** 80

Driver : Integrated.



Watt	Lumens
13W	1200lm
20W	2000lm

Ht(h)	B(x)	W(y)
180	150	150
265	250	250



**Other CCT Available as per request.*

CIRCA

Surface Downlight

Round shape polished finished die cast housing and PC diffuser with anti UV and anti corrosion coating.

Suitable for IP65 surface installation at balcony, porches etc for downlight panel applications


Beam Angle : Diffused / **CRI:** 80

Driver : Integrated.



Watt	Lumens
20W	2000lm
30W	3000lm

Dia(x)	Ht(h)
250	60
320	60



JUDY


Surface / Spike Mounted Spotlight

Spike design with Snoot. Die cast Aluminium and tempered glass. Anti UV and anti corrosive powder coat.

Suitable for landscape & gardens as IP65 solution


Beam Angle : 14°/ 25°/40°/ 60° **CRI:** 80

Driver : Integrated.



Watt	Lumens
13W	1000lm

Dia(x)	B(b)	Ht(y)	Ht(h)
98	114	125	314



**Other CCT Available as per request.*

DAZZLE

Wall Recessed Path Light

Spike with Die cast Aluminium and tempered glass. Anti UV and anti corrosive powder coat.


Suitable for landscape & gardens as IP65 solution

Beam Angle : Assymetrical / **CRI:** 80
Driver : Integrated.



Watt	Lumens
7W	500lm

L(x)	B(b)	Ht(y)	Ht(h)
66	100	100	278



COLON

Surface Wall Top Light

Bollard with rectangular aluminium support strong frame design, with lamp placed on top die cast piece.


Suitable for IP65 application for landscape lawns, parks and pathways.

Beam Angle : Assymetrical / **CRI:** 80
Driver : Integrated.



Watt	Lumens
13W	1200lm
13W	1200lm
13W	1200lm

Dia(x)	Ht(h)
120	300
120	500
120	800



**Other CCT Available as per request.*

BOLETE

LED Bollard Light

Bollard with die cast Aluminium housing with PC lamp mounted on top for triangle illumination throw.

Suitable for IP54 application for landscape lawns, parks and pathways.


Beam Angle : Assymetric / **CRI:** 80

Driver : Integrated.



Watt	Lumens
7W	520lm
7W	520lm
7W	520lm

L(x)	Ht(h)
183	300
183	500
183	800



IRIS

LED Bollard Light

Bollard with die cast Aluminium housing with PC lamp mounted on top .

Suitable for IP65 application for landscape lawns, parks and pathways.



Beam Angle : 14°/ 25°/40°/ 60° **CRI:** 80

Driver : Integrated.



Watt	Lumens
7W	650lm
7W	650lm

L(x)	B(b)	Ht(h)
140	90	600
140	90	800



**Other CCT Available as per request.*

RIVERA

LED Bollard Light

Bollard with advanced design concept with Light flowing from Top diffuser on to the aluminium die cast ribs on body.



Suitable for IP65 application for landscape lawns, parks and pathways.

Beam Angle : Assymetrical / **CRI:** 80
Driver : Integrated.



Watt	Lumens
7W	500lm
7W	500lm

L(x)	B(b)	Ht(h)
66	100	100
66	100	100



TULIP

LED Bollard Light

Bollard with die cast construction with lights from head pours out from both sides of head forming two circular beams of light.


Suitable for IP65 application for landscape lawns, parks and pathways.

Beam Angle : Assymetrical / **CRI:** 80
Driver : Integrated.



Watt	Lumens
13W	1200lm
13W	1200lm
13W	1200lm

Dia(x)	Ht(h)
120	300
120	500
120	800



**Other CCT Available as per request.*



Industrial & Outdoor

Factory lights, also known as high bay lights, traditional light source factory lights are composed of a light source, a ballast, a trigger, a lampshade and a lamp holder. LED lamps are used to create a modern industrial lighting. LED lights have the following benefits : High level of energy efficiency: Coefficient of performance of modern LED lamps is approaching 100%.

Artificial Light is a necessity in our everyday lives. It helps us to work during hours of poor lighting and illuminate our night. Most of the current technology heavily relies on artificial light.

SOLUS

Highbay Surface/Pednat Light


High Performance LED HIGHBAY luminaires with die cast aluminum housing are high intensity indoor / outdoor lights. These lights are designed to illuminate large areas with their wide dispersion without affecting the environment.

Beam Angle : Flood CRI: 80

Driver : Non Integrated

IP65

WW
NW
CW



Watt	Lumens
50W	6000lm
80W	9600lm
100W	12000lm
120W	15600lm
150W	19500lm
180W	23400lm
200W	26000lm
250W	32500lm

Dia(x)	Ht(h)
50	165
60	230
60	230
70	320
70	320
70	320
85	370
85	370





NEVA

LED Streetlight

This streetlight luminaries comprises of die cast aluminum housing with powder coated & toughened glass / poly-carbonate lens plate.

Beam Angle : Flood CRI: 80
Driver : Non Integrated

IP65	WW
	NW
	CW

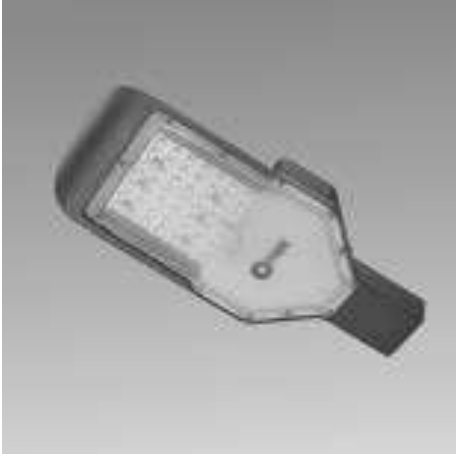

Watt	Lumens
20W	2000lm
24W	2400lm
30W	3000lm
60W	6000lm
70W	7000lm
90W	9000lm
100W	10000lm
120W	12000lm

L(x)	B(b)	Ht(h)
330	124	47
288	107	53
288	107	53
406	162	55
406	162	55
630	221	74
630	221	74
630	221	74




INNOVA

Linear LED Downlight

This Industrial luminaries comprises of dust & weatherproof polycarbonate housing, silicon gasket with clear polycarbonate diffuser.

Beam Angle : Diffused **CRI:** 80
Driver : Integrated



Watt	Lumens
20W	1800lm
40W	3600lm
60W	5400lm


L(x)	B(b)	Ht(h)
610	100	75
1210	100	75
1510	100	75

ARENA

Floodlight


This floodlight luminaries comprises of die cast aluminum housing with powder coated & toughned glass. This lights are designed to illuminate large areas with their wide dispersion.

Beam Angle : Flood **CRI:** 80
Driver : Integrated



Watt	Lumens
10W	1000lm
20W	2000lm
30W	3000lm
50W	5000lm
100W	10000lm

L(x)	B(b)	Ht(h)
121	113	43
142	129	43
169	158	55
202	212	61
255	265	61

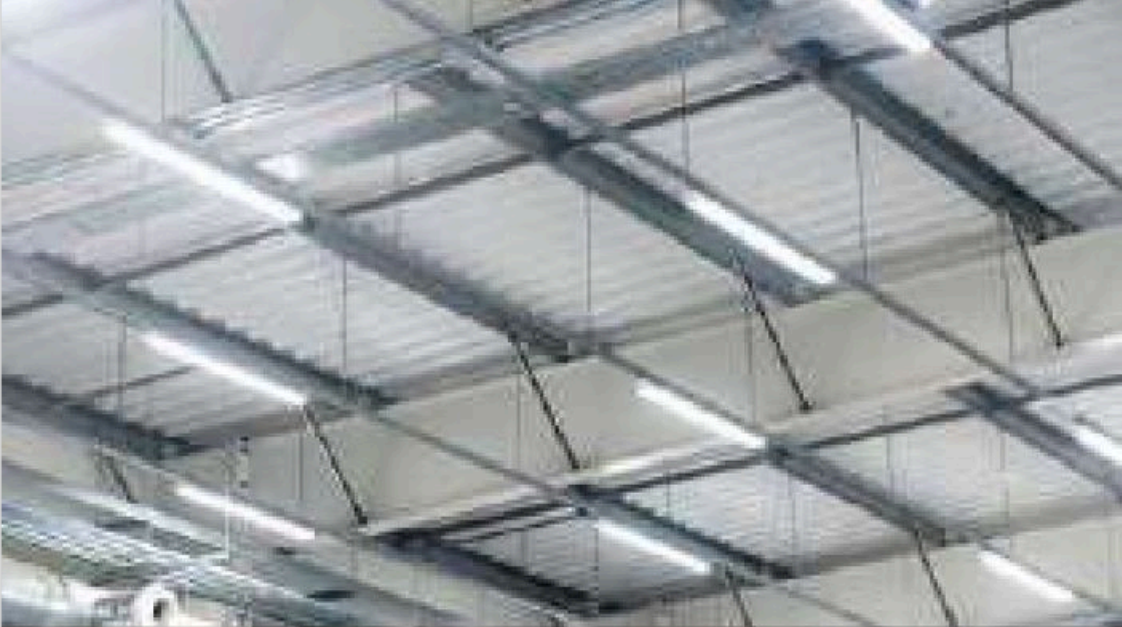





NOTES

General Terms & Conditions:

Prices of all items in this price list are of standard luminaires & are inclusive of GST.

Prices are subject to change without prior Notice.

Product Photographs shown are indicative. Actual product may differ at time of supply.

While the product images, specifications and other details herein are represented to the best of graphic possibility, Focus Lighting and Fixtures Ltd. reserves the right to make technical and formal alterations to the products and specifications in the interest of development / improvement.

All technical parameters like Lm/W, Wattage etc, are subject to tolerance as per BIS standards.

Care has been taken to ensure that the information contained within is correct however company reserves the right to issue amendment's, which may arise due to any errors in price list.

All disputes are subject to Mumbai Jurisdiction only.

The copyrights of all designs, drawings, specifications and information contained in this catalogue are and shall remain the property of Focus Lighting and Fixtures Ltd. and must not be used, copied, published or divulged by any person in whole or in part without exclusive written authorisation from the **Focus Lighting and Fixtures Ltd.**



FOCUS°
LIGHTING & FIXTURES LTD

PLUS°
LIGHT TECH

TRIX.

L&B° Lumens
& Beyond

Corporate Office

Focus Lighting & Fixtures Ltd.
1007-1010, Corporate Avenue,
Sonawala Road, Goregaon(E),
Mumbai-400063. India.

T +91-22-2686 5671 -5

E info@trix.co.in

Work

Focus Lighting & Fixtures Ltd.
Survey No.396/24, Plot no.71/72,
New Ahmedabad Industrial estate,
NH 8A, Moraiya,
Dist. Sanand, Gujarat -382210

T +91-22-2686 5671 -5

www.trix.co.in

Authorised Channel Partner
ara
MARKZ
— crafting lifestyle —

1/135, Kamban Street
Vinayagapuram
Coimbatore

sales@aramarkz.com
<https://aramarkz.com>

+91-744-840-2811
+91-422-357-2191

Follow us on






















#illuminatinglivessmartly

LINEAR LIGHTS


trix.co.in



PRODUCT RANGE

ALSF2309 	ALSF2309 	TRX - SF2309	TRX - CP2309	ALCP2309_01 	ALCP2309_01 
	ALSF2323 	TRX - SF2323	TRX - CP2323		
	ALSF3512 	TRX - SF3512	TRX - CP3512		
	ALSF3535 	TRX - SF3535	TRX - CP3535		
ALSF5012 	ALSF5012 	TRX - SF5012	TRX - CP5012	ALCP5012 	ALCP5012 
	ALSF5035 	TRX - SF5035	TRX - CP5035		
	ALIN5050 	TRX - SF5050	TRX - IN5070		ALIN5070 
ALSF7535 	ALSF7535 	TRX - SF7535	TRX - CP7535	ALCP7535 	


PRODUCT RANGE



ALIN3570




TRX - IN3570



ALHG7590



TRX - IN7590




AL10035SU


AL10035SU




TRX - IN10035




AL10035CP





TRX - CP10035



TRX - Y3930




TRX - Y5853



ALIP1818

TRX - IP1818



TRX - IP3030



ALFL17

ALFL17


TRX - FL17



ALFU2309


ALFU2309

TRX - FU2109



ALHG2915


TRX - HG2915





ALOV37

ALOV37

TRX - OV37





TRX - RO60



ALSK6025

TRX - SK7025



ALWP7028

TRX - WP7024



TRXLNR202526



1/135, Kamban Street
Vinayagapuram
Coimbatore

sales@aramarkz.com
<https://aramarkz.com>

+91-744-840-2811
+91-422-357-2191

Follow us on
[in](#) [ig](#) [wh](#) [fb](#)

Contact Us

Office:
1007-1010 Corporate Avenue,
Sonawala Crosslane, Goregoan (E)
Mumbai- 400063.
P:+91-2226865671 - 75 | E: sales@trix.co.in | W: trix.co.in